



Affordable, robust solution

HF-Selectalume II for TL-D lamps

HF-Selectalume II is the most cost-effective, reliable, slim and affordable fluorescent solution, with highly disruptive technology for energy saving, system flexibility and unsurpassed performance. The cost-saving HF-Selectalume II has a robust design which meets all relevant international safety and performance standards. HF-Selectalume II is intended for use with indoor lighting fixtures such as spotlights, downlights and recessed luminaires, which are largely used in office, retail, industry, hotel, restaurant and other applications where control devices are installed with occasional On/Off switching activity

Benefits

- Automatic restart (after voltage dip or lamp exchange) ensures easy operation and hassle-free re-lamping.
- DC emergency operation in line with IEC/EN 60598-2-22 luminaire norms
- Suitable for luminaires in protection class I and, after testing, class II

Features

- Complies with CE and Kema-Keur
- Average lifetime in excess of 50,000 hours at $T_a = 50\text{ }^{\circ}\text{C}$
- Rapid warm lamp start with filament pre-heating $< 1.6\text{ sec}$
- Active power factor correction to ensure constant light, irrespective of mains-voltage fluctuations
- The Wago 744 connector offers the flexibility for horizontal-manual or push-in robot wiring, including a simple wire-release facility

HF-Selectalume II for TL-D lamps


Application

- Ideal for applications where it is necessary to reduce the wattage per square meter or operating costs
- Applications where control devices are installed with occasional On/Off switching (e.g. where movement or light sensor detectors switch the mains)
- Professional indoor applications with long operating hours such as office buildings, call centers, classrooms, hotels, department stores, retail stores, supermarkets, convenience stores and industrial premises (e.g. corridors and low-bay trunking systems) and city parking lots

Versions



Dimensional drawing

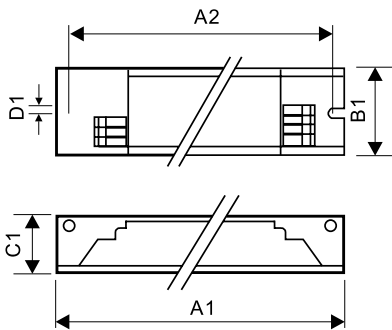

Product

HF-S 118/136 TL-D II 220-240V 50/60Hz

HF-S 218/236 TL-D II 220-240V 50/60Hz

HF-Selectalume II for TL-D lamps

Approval and application	
Energy Efficiency Index	A2 BAT
Operating and electrical	
Input Frequency	50 to 60 Hz
Input Voltage	220 to 240 V
Emergency operation	
Emergency Ballast Lumen Factor (EBLF) (Nom)	100 %
General information	
Number Of Products On MCB (16A Type B) (Nom)	28
Lamp Type	TL-D
Mechanical and housing	
Housing	L 280x30x28

General information

Order Code	Full Product Name	Number Of Lamps
913713032166	HF-S 118/136 TL-D II 220-240V 50/60Hz	1 piece/unit

Order Code	Full Product Name	Number Of Lamps
913713032466	HF-S 218/236 TL-D II 220-240V 50/60Hz	2 piece/unit

System characteristics

Order Code	Full Product Name	Lamp		Rated
		Power On	Lamp Power On	Ballast-Lamp Power
		PL-L	TL-D	
913713032166	HF-S 118/136 TL-D II 220-240V 50/60Hz	-	35 W	36 W

Order Code	Full Product Name	Lamp		Rated
		Power On	Lamp Power On	Ballast-Lamp Power
		PL-L	TL-D	
913713032466	HF-S 218/236 TL-D II 220-240V 50/60Hz	61.2 W	63.9/32.9 W	36/18 W

