



Greenperform Waterproof G2 - WT188C

WT188C LED40 NW L1200 PSU MW

Power supply unit - Symmetrical - Polycarbonate bowl/cover foggy - 120° -

Greenperform Waterproof G2 luminaire and its components are designed for both indoor and semi-outdoor application (anti-UV PC material housing and diffuser, stainless steel installation accessory). We design for friendly optical, energy saving, reliable quality, and easy wiring.;Beyond that, GreenParking wireless motion detective system is ready to provide the maximum energy saving and new lighting experience to you.

Product data

General Information			
Beam angle of light source	- °	Cable	Cable 0.2 m without plug
Lamp colour code	Neutral white	Protection class IEC	Safety class I
Light source replaceable	No	Glow-wire test	Temperature 750 °C, duration 5 s
Number of gear units	One unit	Flammability mark	-
Driver/power unit/transformer	Power supply unit	CE mark	CE mark
Driver included	Yes	ENEC mark	-
Optic type	Symmetrical	Warranty period	3 years
Optical cover/lens type	Polycarbonate bowl/cover foggy	Constant light output	No
Luminaire light beam spread	120°	Number of products on MCB (16 A type B)	24
Control interface	-	EU RoHS compliant	Yes
Connection	Flying leads/cables	Light source engine type	LED

Greenperform Waterproof G2 - WT188C

Operating and Electrical

Input Voltage	220 to 240 V
Input frequency	50 to 60 Hz
Inrush current	12 A
Inrush time	0.59 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing material	Polycarbonate
Reflector material	Steel
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Stainless steel
Optical cover/lens finish	Opal
Overall length	1177 mm
Overall width	84 mm
Overall height	83 mm
Colour	Grey and White

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	4000 lm
-------------------------------------	---------

Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	117 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial chromaticity	SDCM<5
Initial input power	34 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
Median useful life L80B50	45000 h
Median useful life L90B50	35000 h

Application Conditions


Ambient temperature range	-30 to +45 °C
Maximum dimming level	Not applicable

Product Data

Full product code	911401831697
Order product name	WT188C LED40 NW L1200 PSU MW
Order code	911401831697
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401831697
SAP net weight (piece)	1.399 kg



Dimensional drawing

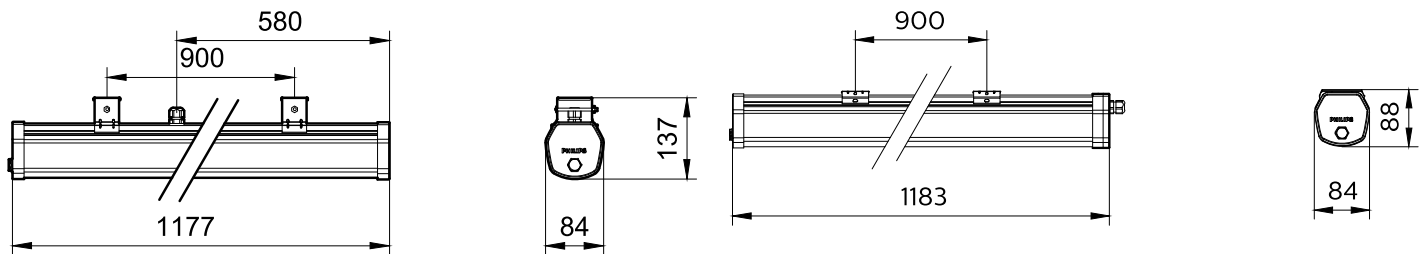

WT188C LED40 NW L1200 PSU MW

WT188C LED40 NW L1200 PSU MW

Greenperform Waterproof G2 - WT188C

