



# TL5 Essential HE Super 80

## TL5 Essential 14W/865 1SL/40

Philips TL5 Essential Super80 is a new fluorescent lamp which provides home users and professional end-users an aesthetic miniaturised lighting solution with high reliability at low price.

### Warnings and Safety

- 20,000 hours lifetime (50% survival point, 3 hour cycle) with preheat ballast which is ENEC compliant. Lifetime performance may differ on non-ENEC compliant ballasts.

### Product data

General Information	
Cap base	G5 [ G5]
Life to 50% failures preheat (nom.)	20000 h
LSF preheat 2,000 hours rated	98 %
LSF preheat 4,000 hours rated	97 %
LSF preheat 6,000 hours rated	95 %
LSF preheat 8,000 hours rated	93 %
LSF preheat 16,000 hours rated	70 %
LSF preheat 20,000 hours rated	50 %
Light Technical	
Colour Code	865 [ CCT of 6,500 K]
Lamp Luminous Flux 25°C EL (Nom)	1260 lm
Lamp Luminous Flux (Nom)	1200 lm
Colour Designation	Cool Daylight
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	90 lm/W
Colour Temperature, horizontal (Nom)	6500 K
Lamp Luminous Efficacy EM (Nom)	84 lm/W


Colour Rendering Index,horiz (Max)	85
Colour Rendering Index,horiz (Min)	80
Colour Rendering Index,horiz (Nom)	82
LLMF 2000 h Rated	94 %
LLMF 4000 h Rated	92 %
LLMF 6000 h Rated	91 %
LLMF 8000 h Rated	90 %
LLMF 12000 h Rated	88 %
LLMF 16000 h Rated	87 %
LLMF 20000 h Rated	86 %
Operating and Electrical	
Technical Lamp Power (Nom)	14 W
Lamp current (nom.)	0.170 A
Temperature	
Design temperature (nom.)	30 °C

# TL5 Essential HE Super 80

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb shape	T5 [ 16 mm (T5)]
Approval and Application	
Mercury (Hg) content (nom.)	2.0 mg
Energy consumption kWh/1,000 hours	15 kWh
Product Data	
Full product code	871150057035255

Order product name	TL5 Essential 14W/865 1SL/40
EAN/UPC – product	8711500570352
Order code	927925986558
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	927925986558
SAP net weight (piece)	47.500 g


## Dimensional drawing

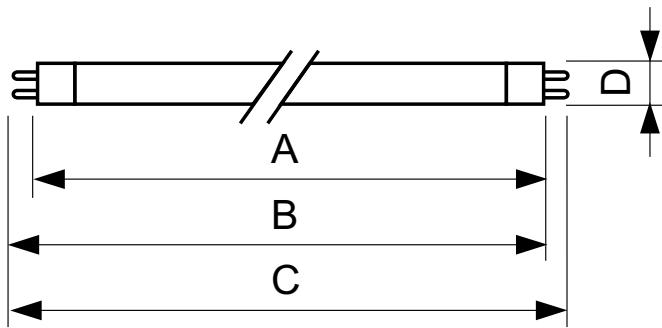

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL5 Essential 14W/865 1SL/40	17.0 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm

TL5 ESS 14W/865

## Photometric data

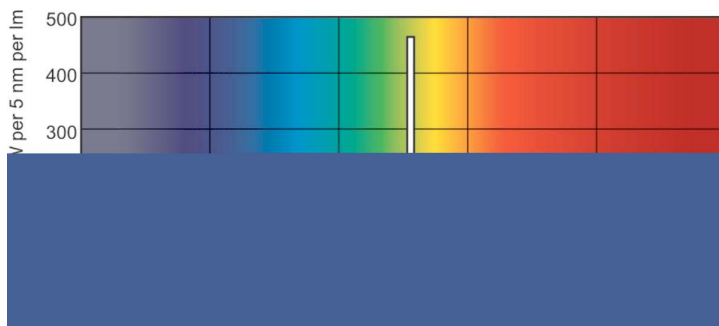

LDPO\_TL5ESS8\_ESS\_865-Spectral power distribution Colour

## TL5 Essential HE Super 80

