



# GreenUp Line Highbay

## BY450P LED95/NW PSU WB EN

840 neutral white - Power supply unit - Wide beam

The GreenUp Line Highbay is a simple LED solution which efficiently illuminates work areas, creating a brighter and better warehouse, retail or manufacture environment. With its three optical designs and energy-efficiency, this easy-to-install and low-maintenance lighting solution is suitable for a variety of applications.

### Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress and as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips/Signify cannot guarantee safe failure and product warranty will become void

### Product data

General Information		Flammability mark	
Beam angle of light source	- °		For mounting on normally flammable surfaces
Lamp colour code	840 neutral white	CE mark	CE mark
Light source replaceable	No	ENEC mark	-
Number of gear units	One unit	Warranty period	3 years
Driver/power unit/transformer	Power supply unit	Constant light output	No
Driver included	Yes	Number of products on MCB (16 A type B)	11
Optic type	Wide beam	EU RoHS compliant	No
Optical cover/lens type	Linear-lens array in polycarbonate cover	Light source engine type	LED
Luminaire light beam spread	90°	<b>Operating and Electrical</b>	
Control interface	-	Input Voltage	220 to 240 V
Connection	Flying leads/cables	Input frequency	50 to 60 Hz
Cable	Cable 1.5 m without plug	Inrush current	46 A
Protection class IEC	Safety class I	Inrush time	440 ms
Glow-wire test	Temperature 650 °C, duration 5 s		

# GreenUp Line Highbay

Power factor (min.)	0.95
---------------------	------

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Housing material	Extruded aluminium
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Optical cover/lens finish	Clear
Overall length	918 mm
Overall width	125 mm
Colour	Aluminium and White

## Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK03 [ 0.3 J]

## Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	9500 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	119 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80

Initial chromaticity	(0.38.0.38)SDCM<5
Initial input power	80 W
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
Median useful life L80B50	40000 h
Median useful life L90B50	30000 h

## Application Conditions


Ambient temperature range	-20 to +45 °C
Maximum dimming level	Not applicable
Suitable for random switching	No

## Product Data

Full product code	911401530851
Order product name	BY450P LED95/NW PSU WB EN
Order code	911401530851
SAP numerator – quantity per pack	1
Numerator – packs per outer box	2
SAP material	911401530851
SAP net weight (piece)	1.999 kg



## Dimensional drawing

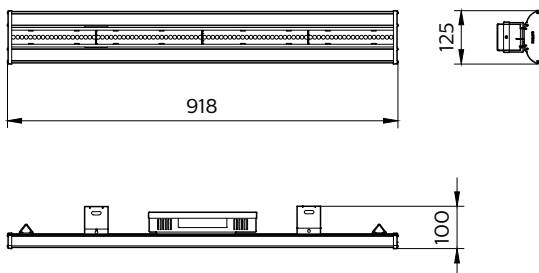

BY450P LED95/NW PSU WB EN

## GreenUp Line Highbay

