



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL-D 18W/10 1SL/25

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Main application	Insect traps
Life to 50% failures (nom.)	13000 h
Useful life (nom.)	9000 h
Light Technical	
Colour Code	10
Colour Designation	Actinic
Chromaticity coordinate X (nom.)	222
Chromaticity coordinate Y (nom.)	210
UV Depreciation at 2,000 h	8 %
UV depreciation at 5000 hours	12 %
Depreciation at 500 Hours	16 %
Operating and Electrical	
Technical Lamp Power (Nom)	18 W
Lamp current (nom.)	0.36 A

Voltage (nom.)	59 V
Mechanical and Housing	
Bulb shape	T26 [T 26 mm]
Approval and Application	
Mercury (Hg) content (nom.)	5.0 mg
UV	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	5.0 W
Product Data	
Full product code	871150026325440
Order product name	Actinic BL TL-D 18W/10 1SL/25
EAN/UPC – product	8711500263254
Order code	928048001003
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25

Actinic BL TL(-K) / TL-D(-K)

SAP material	928048001003
SAP net weight (piece)	71.000 g



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 18W/10 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL-D 18W/10

Photometric data

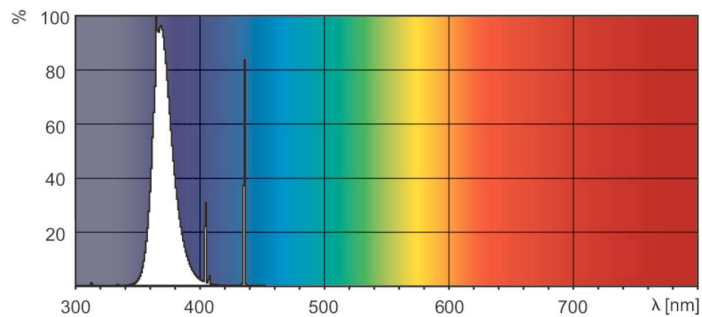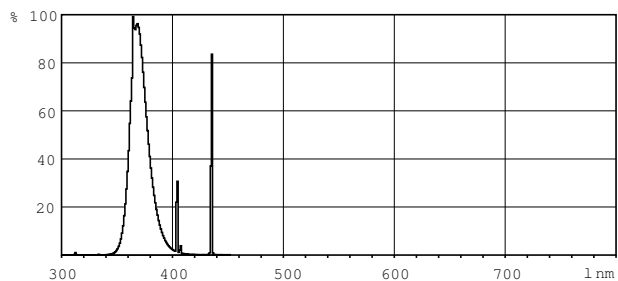

XDPB_XUBTLD_10-Spectral power distribution B/W

XDPO_XUBTLD_10-Spectral power distribution Colour

