



Architectural LED floodlight for fixed or dynamic lighting.

UniFlood C

UniFlood C is a circular-shaped, exterior-rated and cost-effective architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications. The robust mechanical design and high-efficiency optical design make it ideal for illuminating multi-storey exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colours, RGB, RGBW and tunable white. Six different spread lenses, ranging from narrow spot to wide flood, and a DMX512/RDM control option available to give architects and designers the freedom to explore a wide range of concepts and design with no limitations.

Benefits

- Available in White, Monochromatic colours, RGB, RGBW and Tunable White
- Wide Range of Beam Angles from Narrow Spot to Wide Flood
- Available in DMX512/RDM control interface option

Features

- Robust design and IP66 for outdoor use
- Drainage design to reduce dirt and water accumulation
- Available optical distributions: 3.5°, 5°, 15°, 30°, 45° and 60°
- Adjustable $\pm 90^\circ$ tilting angle
- Through wiring for the DMX signal via dedicated cables with IP67 connectors

Application


- Bridges, Monuments, Facades
- Landscaping
- Parks and plazas

UniFlood C

Warnings and Safety

- For outdoor use only

Versions

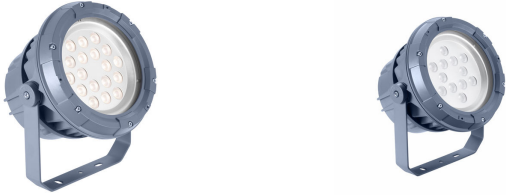

Approval and Application

Mech. impact protection code IK08

Controls and Dimming

Dimmable No

General Information

CE mark CE mark

Light source colour Neutral white

Driver included Yes

Initial Performance (IEC Compliant)

Init. Corr. Colour Temperature 4000 K

Init. Colour Rendering Index 80

Mechanical and Housing

Colour Dark Grey

General Information (1/2)

Order Code	Full Product Name	Luminaire		Flammability mark	Light source replaceable
		light beam spread	Optical cover/lens type		
911401740022	BVP322 18LED 40K 220V 40	40°	Flat glass	For mounting on normally flammable surfaces	No
911401777562	BVP321 12LED 40K 220V 30	-	Polymethyl methacrylate lens	-	-
911401777652	BVP321 12LED 40K 220V 40	-	Polymethyl methacrylate lens	-	-

General Information (2/2)

Order Code	Full Product Name	Number of gear units
911401740022	BVP322 18LED 40K 220V 40	One unit
911401777562	BVP321 12LED 40K 220V 30	-

Order Code	Full Product Name	Number of gear units
911401777652	BVP321 12LED 40K 220V 40	-

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial luminous flux
911401740022	BVP322 18LED 40K 220V 40	2175 lm
911401777562	BVP321 12LED 40K 220V 30	1900 lm

Order Code	Full Product Name	Initial luminous flux
911401777652	BVP321 12LED 40K 220V 40	1870 lm

