



# GreenPerform Panel

## RC160V LED60S 840 W60L120 PSU

- - Wide beam - Polystyrene bowl/cover prismatic - 110°

GreenPerform Panel is the slimmest Panel with highest efficacy in the market. It offers two lumen options with four dimension types, 200X1200, 300X1200, 600x600,600x1200, and three mounting options, recessed, suspended and plaster ceiling.

### Product data

General Information		Operating and Electrical	
Beam angle of light source	- °	Number of products on MCB (16 A type B)	60
Lamp colour code	840 neutral white	EU RoHS compliant	Yes
Light source replaceable	No	LED engine type	LED
Number of gear units	1 unit	<b>Operating and Electrical</b>	
Driver/power unit/transformer	-	Input Voltage	220 to 240 V
Driver included	Yes	Input frequency	50 to 60 Hz
Optic type	Wide beam	Initial CLO power consumption	NA W
Optical cover/lens type	Polystyrene bowl/cover prismatic	Average CLO power consumption	NA W
Luminaire light beam spread	110°	Inrush current	16 A
Control interface	-	Inrush time	160 ms
Connection	Internal connector	Power factor (min.)	0.9
Cable	-	<b>Controls and Dimming</b>	
Protection class IEC	Safety class II	Dimmable	No
Glow-wire test	Temperature 650 °C, duration 30 s	<b>Mechanical and Housing</b>	
Flammability mark	-	Housing material	Aluminium
CE mark	CE mark	Reflector material	-
ENEC mark	-	Optic material	Polystyrene
Warranty period	3 years		
Constant light output	No		

## GreenPerform Panel

Optical cover/lens material	Polystyrene
Fixation material	Steel
Optical cover/lens finish	Frosted
Overall length	1195 mm
Overall width	595 mm
Overall height	10 mm
Colour	White

### Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK03 [ 0.3 J]

### Initial Performance (IEC Compliant)

Initial luminous flux	6000 lm
Luminous flux tolerance	+/-5%
Initial LED luminaire efficacy	110 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM<4
Initial input power	55 W

Power consumption tolerance	+/-10%
-----------------------------	--------

### Over Time Performance (IEC Compliant)

Median useful life L80B50	50 h
---------------------------	------

### Application Conditions


Ambient temperature range	-20 to +45 °C
Maximum dimming level	Not applicable

### Product Data

Full product code	911401719532
Order product name	RC160V LED60S 840 W60L120 PSU
Order code	911401719532
Numerator – quantity per pack	1
SAP numerator – packs per outer box	2
Material no. (12 NC)	911401719532
SAP net weight (piece)	4.200 kg



## Dimensional drawing

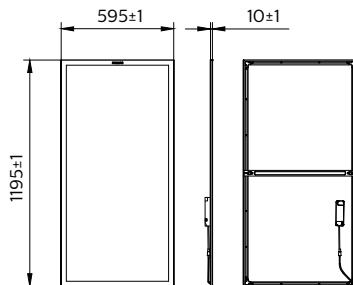

SmartPanel 2.0 RC160V

